

# METAL HANGER STRAP

## 524/528 SERIES

### SPECIFICATION

Sioux Chief metal hanger strap shall be used where necessary to support CTS, IPS or DWV pipe. Metal strap shall be made with galvanized or copper-plated steel and installed in accordance with national codes pertaining to hanger spacing and slope requirements. Metal hanger strap shall feature 1/4" or 3/16" pre-drilled pilot holes in alternating pattern and strap shall be 3/4" wide.

### INSTALLATION

Wear gloves and eye protection when handling metal hanger strap to avoid injury. Cut hanger strap to desired length. Using approved hardware (not provided), secure hanger strap with nail or screw to joist or stud member. Hanger strap may be looped or double wrapped around piping and may be installed on same side or opposite sides of floor joists or stud members.

### MATERIALS

**524 series:** 24-gauge galvanized steel

**524-CPK2 series:** 24-gauge copper-plated steel

**528 series:** 28-gauge galvanized steel

### MAXIMUM LOAD RATING

**24 gauge:** 750 lbs.

**28 gauge:** 665 lbs.

### SAFE WORKING TEMPERATURE

250°F

### DIMENSIONS

**A:** Center-line 1"  
**B:** Width 3/4"


ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



524-10



524-10CPK2

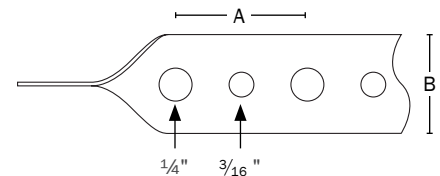

## Create Item Number

### 52A-BC

e.g. **524-50:** 50 ft. coil of 24-gauge, galvanized steel hanger strap with alternating 1/4" and 3/16" holes

#### THICKNESS **A**

**4** = 24 gauge  
**8** = 28 gauge

#### LENGTH **B**

**10** = 10 ft.  
**50** = 50 ft.  
**23<sup>1</sup>** = 25 ft.  
**100** = 100 ft.

#### MATERIAL/HOLE PATTERN **C**

**\_** = galvanized steel with alternating 1/4" and 3/16" holes  
**CPK2<sup>2</sup>** = copper-plated steel with alternating 1/4" and 3/16" holes

<sup>1</sup>Only available in 28-gauge, galvanized steel coils with alternating holes.  
<sup>2</sup>Only available in 10 ft. rolls.