

CORRUGATED SLEEVE

» 550-S12 SERIES

SPECIFICATION

Sioux Chief's 550-S12 series corrugated sleeve material shall be used with cold and hot water PEX distribution systems to protect supply lines in soil or concrete slabs allowing for removal and replacement of the tubing if necessary after the pour.

INSTALLATION

Push 1/2 PEX tubing through sleeve and cut to desired length. Use Sioux Chief PEX Chair™ (not provided) or rebar stake with steel wire or other fastening devices to secure corrugated sleeve from floating during concrete pour.

MATERIALS

Polypropylene

LOAD RATING

70 lbs. per 19" linear

TEMPERATURE RANGE

32°F – 212°F without pressure


DIMENSIONS

A: O.D. .978"
B: I.D. .820"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



550-S12H & 550-S12C

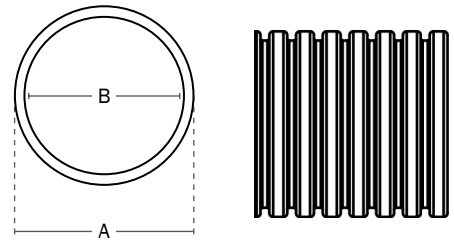

Made in Chile

Choose Item Number

550-S12A

e.g. **550-S12C**: 1/2" × 100-ft. coil of Blue corrugated sleeving

550-S12C = Blue corrugated sleeve 1/2" × 100-ft.

550-S12H = Red corrugated sleeve 1/2" × 100-ft.