

# PLASTIC P-TRAP - THREADED ADAPTER & ESCUTCHEON

## »» 230 SERIES

### SPECIFICATION

Sioux Chief 230 Series P-Traps shall be installed where necessary in plumbing systems. Trap shall provide a liquid seal that prevents the back passage of gas without affecting the flow of sewage or wastewater through the system when installed in a properly vented DWV system. Trap shall include nuts, washers, trap adapter, and escutcheon. IAPMO Listed. Designed in accordance with ASTM F409-12.

### MATERIALS

**Tubular/Nuts:** Chrome-plated ABS

**Washers:** Polyethylene, Buna-N rubber

**Trap Adapter:** PVC


**Escutcheon:** Chrome-plated ABS

### DIMENSIONS

<b>A:</b> Overall length	11 <sup>1</sup> / <sub>4</sub> "
<b>B:</b> Wall bend length	7 <sup>1</sup> / <sub>2</sub> "
<b>C:</b> Height	5"
<b>D:</b> Trap adapter length	1 <sup>3</sup> / <sub>4</sub> "
<b>E:</b> Width	1 <sup>1</sup> / <sub>2</sub> "
<b>F:</b> Escutcheon width	3"
<b>G:</b> Escutcheon height	2 <sup>1</sup> / <sub>4</sub> "

Dimensions are approximate and provided for reference only

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

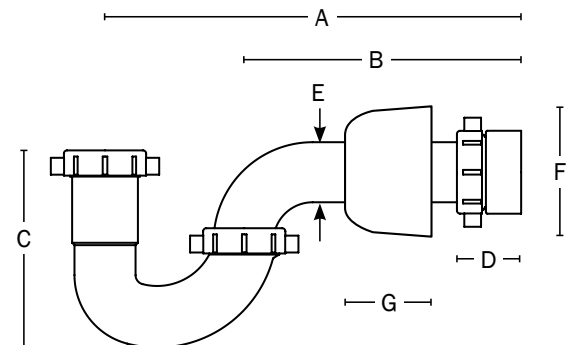

**Item Number**

**230-0226301**