

SHOWER ARM ADAPTER

» 616 SERIES

Shower WallNut™

SPECIFICATION

Sioux Chief's Shower WallNut shower arm adapter shall be installed at shower riser. Riser shall be Sioux Chief 1/2" nominal Type L copper stub out ell that is bracketed by Sioux Chief StrongArm Bracket with WallNut LockBlock tube clamping device. Shower Arm Adapter shall be UPC listed. Shower arm adapter system shall provide connection to water supply outside the finished wall, to eliminate leaks behind the wall at the riser which promote mold growth.

MATERIALS

Adapter body: Reinforced Nylon

Lock ring: 301 Stainless steel

O-ring: Buna-N

Escutcheon: Brass with finish/coating

INSTALLATION

Brace copper stub out ell using StrongArm Bracket with Shower WallNut LockBlock at rough in stage. After finished wall has been installed, sand the entire stub out surface back to the finished wall. Cut off the stub out leaving exactly 1½" stubbed out from the wall. Deburr the cut end, then push Shower WallNut over the tube and against wall. Insert nose of first pliers into copper tube and hold firmly. Swing a second pair of pliers or a shower arm tool, levering off first pair of pliers to push Shower WallNut firmly against finished wall. Holding hex of WallNut adapter with pliers, thread a brass shower arm completely into FIP threads. **Use ONLY brass shower arms. DO NOT use thread sealant or P.T.F.E. tape on Shower WallNut end of shower arm.** Holding hex of WallNut adapter with pliers, rotate shower arm to final (6-o'clock) position. To prevent rotation after shower arm is installed, insert provided screws through molded holes in flange. Firmly push provided escutcheon onto Shower WallNut until it snaps and locks into place.

IMPORTANT WARRANTY NOTE

Sioux Chief's Limited Lifetime Warranty on the Shower WallNut is only applicable when (a) Sioux Chief copper stub out ell or preformed copper shower riser (b) StrongArm Bracket with WallNut LockBlock and (c) Shower WallNut Shower Arm Adapter are used and installed according to manufacturer's installation guidelines. Substitution of components voids warranty.


SAFE WORKING TEMPERATURE

140°F

DIMENSIONS

A: Overall diameter	2.175"
B: Overall height	0.775"
C: Adapter I.D.	For 1/2" copper tube
D: Connection threads	1/2" FIP

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

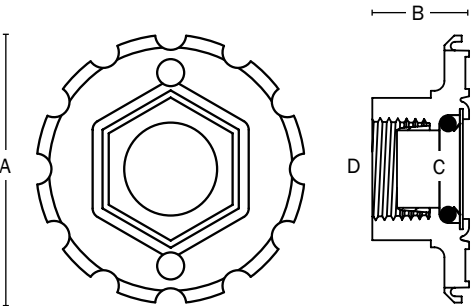

Create Item Number

616-A

e.g. **616-02C:** Shower WallNut shower arm adapter system with chrome-plated escutcheon

ESCUTCHEON FINISH A

02BM = Matte Black

02C = Chrome-plated

02RB = Oil-Rubbed Bronze

02SN = Satin Nickel

Accessories - Available Separately:
307-616: Shower WallNut removal tool
307-625: Shower arm installation tool