

# MICRO FUEL LINE

## »» BLENDED POLYURETHANE

### ATTRIBUTES

Sioux Chief micro fuel line is manufactured to specifications from polyurethane material. Fuel line has excellent flexibility and resilience and will not leach contaminants into fuels. Fuel line is ozone, weather and abrasion resistant and resistant to many oils, fuels, and grease. See website for chemical resistance listing.

**Operating temperature range:** -95°F (-71°C) to 200°F (93°C)

**Material:** Blended polyurethane

**Color:** Translucent orange

**Hardness:** Durometer Shore 80+/-3

### APPLICATIONS


Fuel line for small motors, lawn mowers, boat motor, snow blowers

**⚠ WARNING: Not intended for use with potable water.**

### PRESSURE RANGE

I.D.	O.D.	WALL	WORKING PRESSURE (PSI @70°F)
3/32"	3/16"	.0469"	133
7/64"	1/4"	.0703"	133
1/8"	1/4"	.0625"	133

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

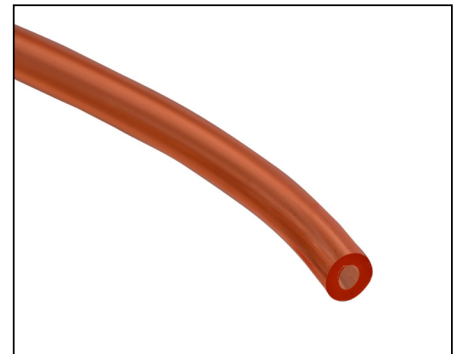

## Create Item Number

### 900-14 A B R C D

e.g. **900-14010R01005:** Micro Fuel Line 7/64" ID x 1/4" OD, Orange, 100ft Reel

ID SIZE <u>A</u>	WALL <u>B</u>	LENGTH <u>C</u>	PACKAGE <u>D</u>
<b>01</b> = 7/64" or 3/32"	<b>0</b> = .0703"	<b>0005</b> = 5ft	<b>1</b> = Coil
<b>02</b> = 1/8"	<b>3</b> = .0625"	<b>0010</b> = 10ft	<b>5</b> = Reels
	<b>8</b> = .0469"	<b>0100</b> = 100ft	

\*Not all size, wall thickness and length combinations available. Contact your local rep to confirm availability.