

ACOUSTICAL ADJUSTABLE LOOP HANGER

» 514-GQ SERIES

PipeDown™ Loop Hanger

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 514 series acoustical loop hangers shall be used where necessary to suspend or support non-insulated stationary CTS piping from threaded rod while providing isolation to reduce noise transfer and protection against contact of dissimilar metals. Hanger must be installed in accordance with national code requirements for light commercial applications. Hanger shall be sized to allow for thermal expansion and contraction and TPE material shall be compatible with copper, PEX and CPVC. Hanger shall comply with ANSI/MSS SP-58 Type 10 and WWH-171 Type 10. Hanger shall be IAPMO and UL certified.

MATERIALS

Hanger: 18-ga. pre-galvanized per ASTM A653

Liner: TPE shore 45A

Nut: 3/8-16" zinc-plated steel

MAXIMUM LOAD RATING

300 lbs.


DIMENSIONS

Dimensions = Inches.

CTS	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
TPE Length	2.00	3.00	3.00	4.00	5.00	5.00
A: Width	0.75	0.75	0.75	0.75	0.75	0.75
B: Height	2.40	2.66	3.00	3.25	3.72	3.57
C: Tube Centerline	1.65	1.78	1.95	2.08	2.31	2.07



514-G03Q

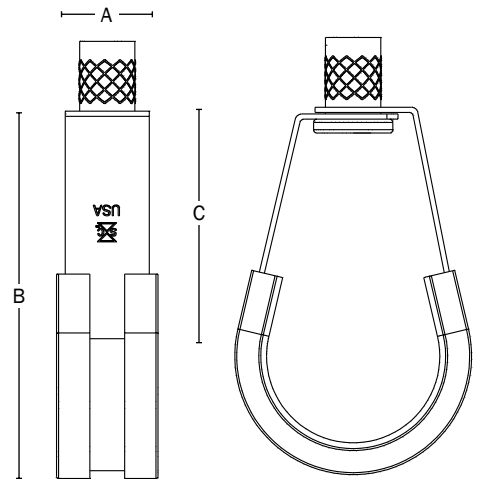

Made in USA

Create Item Number

514-G0AQ

e.g. **514-G04Q:** PipeDown™ acoustical loop hanger for 1" CTS

TUBE/PIPE SIZE A

- 2 = 1/2"
- 3 = 3/4"
- 4 = 1"
- 5 = 1 1/4"
- 6 = 1 1/2"
- 7 = 2"