

# SUSPENSION BRACKET

» 521-55 SERIES

PipeEye™ Suspension Bracket

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief PipeEye™ Suspension Bracket shall be used where necessary to insulate, secure or suspend copper, PEX or CPVC supply lines in residential or commercial applications. Brackets shall be designed with one, two or four holes with a 1<sup>1</sup>/<sub>32</sub>" I.D. to support 1/2" through 1" CTS tubing using Sioux Chief PipeEye™ insulating grommets. Grommets must be installed with these brackets. Brackets shall be IAPMO certified.

## INSTALLATION

Using approved hardware (not provided) secure bracket to wood or metal studs, joists or anchor to ceiling or any flat surface. Bracket can also be suspended from 3/8" threaded rod. After the bracket is secure, insert tubing through hole. Position the Sioux Chief PipeEye™ plastic grommet around tubing and push grommet through hole until grommet tabs click to lock insulator into place. Rotate insulator to adjust tube's position.

## MATERIALS


21 gauge galvanized steel

## SAFE WORKING LOAD

25 lbs.


## DIMENSIONS

	521-557	521-558	521-559
<b>A:</b> Height	2.12"	3"	4"
<b>B:</b> Foot length	1.5"	1"	1"
<b>C:</b> Width	2"	5"	5"
<b>D:</b> Centerline of hole to foot	1.25"	2"	1.25"
<b>E:</b> Centerline of adjacent hole	-	2.5"	2.5"
<b>F:</b> Centerline of diagonal hole	-	-	3.05"
<b>G:</b> Centerline of hole to foot	-	-	3"
<b>H:</b> Centerline between holes	-	-	1.75"


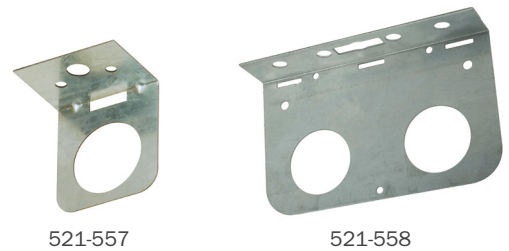


521-557

521-558

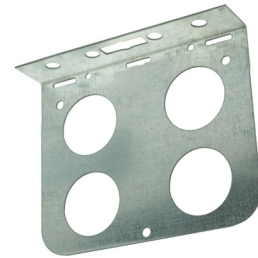

521-559

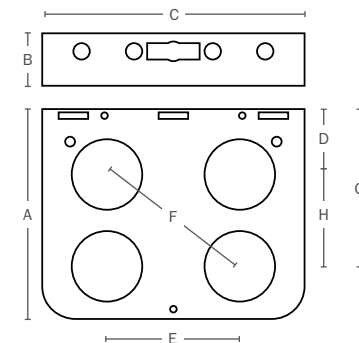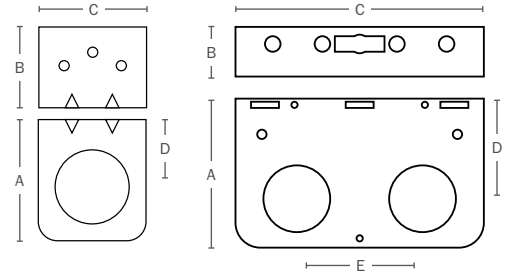

Made in USA

Create Item Number

## 521-55A

e.g. 521-558: PipeEye Suspension Bracket with two 1<sup>1</sup>/<sub>32</sub>" holes

### SUPPLY OUTLETS A

7 = one hole

8 = two hole

9 = four hole