

DWV PIPE HANGER

» 553 Series

Adjust 2 Hang™

SPECIFICATION

Sioux Chief's 553-326 adjustable DWV extension hanger shall be used where necessary to secure CTS or Schedule 40 DWV piping according to national or local code requirements. Hanger shall be 100% corrosion proof and UV resistant. Hanger shall be impact resistant to 0° F, and be able to withstand temperatures up to 140° F.

Hanger shall include two rust resistant, zinc plated nails with a continuous ring shank to provide a permanent installation of the mounting block. Install one nail on each side of releasable thumb tab. Hanger shall feature an adjustable shaft with teeth positioned every 1/4" for proper slope adjustment. Releasable thumb tab shall receive shaft allowing installer to raise or lower height of pipe. Length of shaft can be shortened by cutting or breaking, as necessary. Receiver piece installed on end of shaft accepts releasable zip tie strap that wraps around pipe to secure its position.

MATERIALS

Mount: Nylon

Shaft: ABS, UV and Impact Resistant

Receiver: Poly Carbonate

Zip Tie: Nylon

Nail: 1½ Zinc-Coated

SAFE WORKING LOAD

25-lbs.


MAXIMUM TEMPERATURE RATING:

140° F

DIMENSIONS

| | L | x | W | x | H |
|-----------|-------|---|--------|---|-------|
| Mount: | 1.5" | x | 2.312" | x | .687" |
| Shaft: | 26" | x | 0.75" | x | .125" |
| Receiver: | 1.5" | x | 1.25" | x | .375" |
| Zip Tie: | 26.5" | x | .75" | x | .110" |

| | |
|------------------|-----------------|
| ITEM # SUBMITTED | _____ |
| JOB NAME | _____ |
| LOCATION | _____ |
| ENGINEER | _____ |
| CONTRACTOR | _____ |
| PO# | _____ TAG _____ |

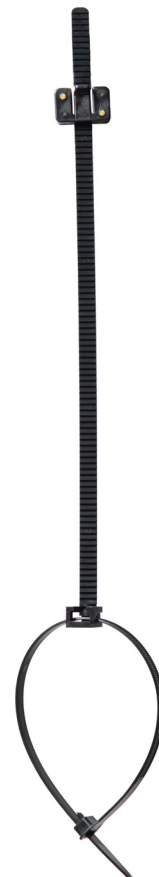

553-326



Mount



Two Nails, 1½"



Shaft



Receiver



Zip Tie



File #7065

Made in USA

Item Number

553-326

Description: Adjustable DWV Extension Hanger