

ADJUSTABLE ON-GRADE FLOOR DRAIN

832 series

Finish Line™

SPECIFICATION

Sioux Chief 832 series Finish Line adjustable on-grade floor drain shall be used where necessary in drainage systems. Drain shall allow adjustment of 1.5" before the concrete pour, and 1.5" after the concrete pour. Strainer shall meet applicable load requirements for intended use. Drain shall have a no-hub connection and include a tapped/plugged trap primer port for optional connection. Designed in accordance with ASME A112.6.3-2001

MATERIALS

ring/strainer: nickel-bronze, 301 stainless steel

head adapter: ductile iron

coring sleeve: ductile iron

coring plug: high-impact polymer

base adapter: ductile iron

STRAINER LOAD RATING

nickel-bronze: 1,000 lbs. (light duty - pedestrian traffic)

stainless steel: 1,500 lbs. (light duty - pedestrian traffic)

STRAINER FREE AREA

29.92 in²


DIMENSIONS

A: connection size	4" or 6" no-hub
B: ring/cover diameter	9"
C: base adapter height	4½"
D: pre-pour adjustable height	4" connection 5½" — 7"
E: post-pour adjustable height	6" connection 6¼" — 7¾"
F: trap primer port	0" — 1½" ½" FIP thread - plugged

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____



832-49DNR

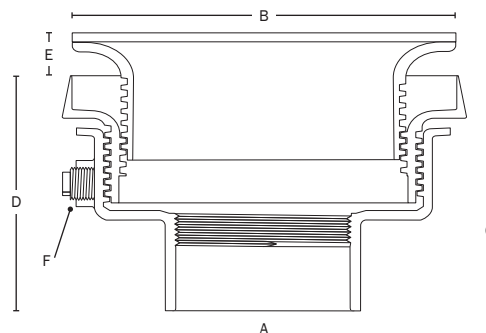

Create Item Number

832-ABC

e.g. 832-49DNRV = Floor drain with 4" no-hub connection, and 9" round nickel-bronze strainer with vandal-resistant screws

A	CONNECTION SIZE	B	RING/STRAINER	C	OPTIONS
<input type="checkbox"/> 49D	4" no-hub	<input type="checkbox"/> NR	Nickel-bronze	<input type="checkbox"/> V	Vandal-resistant strainer screws
<input type="checkbox"/> 6D	6" no-hub	<input type="checkbox"/> SR	Stainless steel		

ACCESSORIES

- | | | | |
|----------------------------------|--------------------------------------|---------------------------------|---|
| <input type="checkbox"/> 863-FA | 4" aluminum condensate funnel | <input type="checkbox"/> 863-FN | 4" nickel-bronze condensate funnel |
| <input type="checkbox"/> 832-FNO | oval nickel-bronze condensate funnel | <input type="checkbox"/> 832-W | flexible red locating bristles with screw |