

LARGE-CAPACITY FLOOR DRAIN

» 860 SERIES

FatMax™

SPECIFICATION

Sioux Chief 860 Series Large-Capacity floor drain with round top. Includes coated cast iron drain body with plugged 1/2" NPT trap primer port, clamping collar, and vandal-resistant grate.

Used in warehouses, mechanical rooms, parking garages, and other areas.
Designed in accordance with ASME A112.6.3

GRATE FREE AREA

44.2 in²

GRATE LOAD RATING


Heavy-Duty - standard (for safe load between 5,000 - 7,500 lbs.)

Extra Heavy-Duty - optional (for safe load between 7,500 - 10,000 lbs.)

DIMENSIONS

A: Drain body height	No-Hub	Push-Joint
2" Connection	5.25"	4.60"
3" Connection	4.60"	4.60"
4" Connection	4.60"	4.60"
6" Connection	5.25"	5.45"
8" Connection	5.25"	N/A

ITEM # SUBMITTED _____
JOB NAME _____
LOCATION _____
ENGINEER _____
CONTRACTOR _____
PO# _____ TAG _____

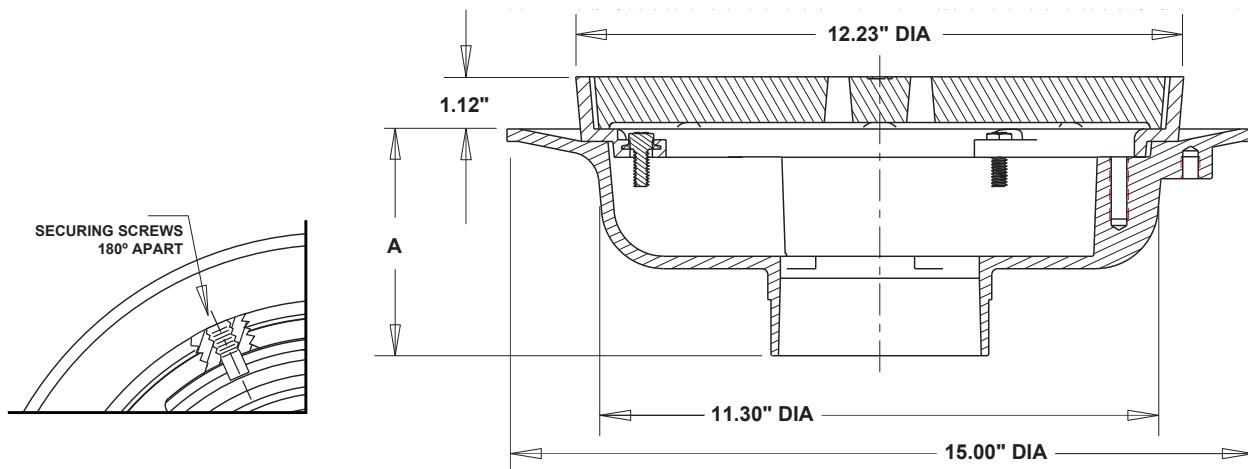

Create Item Number

860-A B C D

e.g. 860-R224INB: Heavy-duty floor drain with 4" No-Hub connection, debris bucket and round cast iron strainer with NB veneer

CONNECTION TYPE A

R22 = No-Hub
R26 = Push-Joint

CONNECTION SIZE B

2 = 2" connection
3 = 3" connection
4 = 4" connection
6 = 6" connection
8 = 8" connection¹

GRATE TYPE C

I = Cast iron grate
IN = Cast iron grate with nickel-bronze veneer

OPTIONS D

9 = Side-outlet connection³
B = Debris bucket²
C = Underdeck clamp kit
E = Adjustable extension
T = Threaded adjustable extension
X = Extra heavy-duty grate (7,500 - 10,000 lbs.)

¹: Not available with Push-Joint connection | ²: Not available for drains with 'E' or 'T' extensions | ³: For 3" and 4" No-Hub connection only