

# ADJUSTABLE FLOOR DRAIN - ROUND TOP

## 862 SERIES

### SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable round nickel-bronze top with vandal-resistant/heel-resistant, secured grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

### MATERIALS

**Drain body:** cast iron

**Clamping collar:** cast iron


**Head/strainer:** nickel-bronze

### LOAD RATING

2,500 lbs.

### DIMENSIONS

<b>A:</b> Connection size	2", 3", 4"				
<b>B:</b> Top diameter	5-1/4"	6"	7"	8"	9-1/2"
<b>C:</b> Strainer adjustment	1.0" - 2.2"	1.0" - 2.5"	1.3" - 2.6"	1.4" - 2.7"	1.6" - 2.8"
Strainer free-area	8.0 in <sup>2</sup>	10.5 in <sup>2</sup>	15.4 in <sup>2</sup>	20.8 in <sup>2</sup>	32.0 in <sup>2</sup>

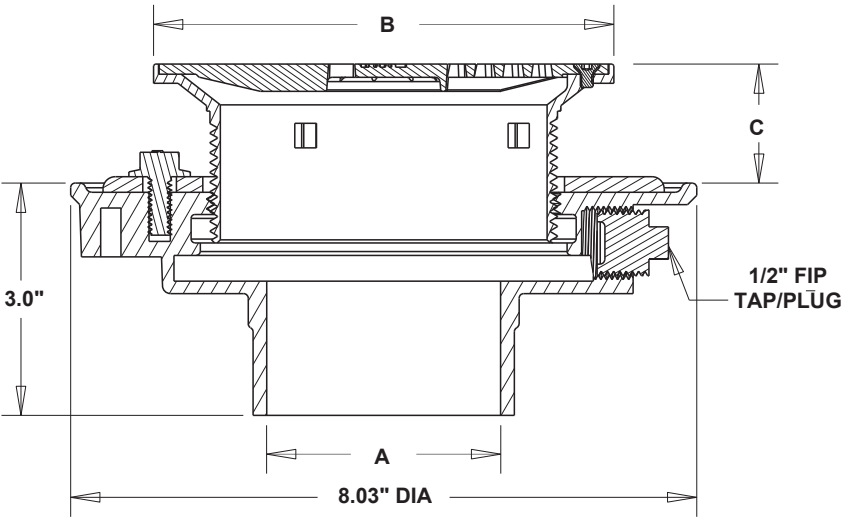

### Create Item Number

### 862-ABCD

e.g. **862-236NRB**: Floor drain - 3" No-Hub connection, 6" round NB head/strainer with debris bucket

#### CONNECTION TYPE **A**

**2** = No-Hub outlet  
**6** = Push-Joint outlet

#### CONNECTION SIZE **B**

**2** = 2"  
**3** = 3"  
**4** = 4"

#### STRAINER DIAMETER **C**

**5NR** = 5-1/4" round  
**6NR** = 6" round  
**7NR** = 7" round  
**8NR** = 8" round  
**10NR** = 9-1/2" round

#### OPTIONS **D**

**B** = Debris bucket  
**E** = Drain head extension adapter<sup>1</sup>  
**9** = Side-outlet connection<sup>2</sup>

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only