

# ADJUSTABLE FLOOR DRAIN - SQUARE TOP

## 862 SERIES

### SPECIFICATION

Sioux Chief 862 Series coated cast iron adjustable floor drain with anchor flange, weep holes, clamping collar, adjustable square nickel-bronze top with vandal-resistant/heel-resistant, secured grate, 1/2" NPT trap primer (plugged) and bottom outlet. Designed in accordance with ASME A112.6.3

General purpose floor drain for use in kitchens, showers, restrooms and other finished areas with foot traffic.

### MATERIALS

**Drain body:** cast iron

**Clamping collar:** cast iron


**Head/strainer:** nickel-bronze

### LOAD RATING

2,000 lbs.

### DIMENSIONS

|                               |                      |                      |                      |                      |                      |
|-------------------------------|----------------------|----------------------|----------------------|----------------------|----------------------|
| <b>A:</b> Connection size     | 2", 3", 4"           |                      |                      |                      |                      |
| <b>B:</b> Top diameter        | 5-1/4"               | 6"                   | 7"                   | 8"                   | 9-1/2"               |
| <b>C:</b> Strainer adjustment | 1.0" - 2.2"          | 1.0" - 2.5"          | 1.3" - 2.6"          | 1.4" - 2.7"          | 1.6" - 2.8"          |
| Strainer free-area            | 10.5 in <sup>2</sup> | 13.6 in <sup>2</sup> | 18.4 in <sup>2</sup> | 25.5 in <sup>2</sup> | 31.0 in <sup>2</sup> |

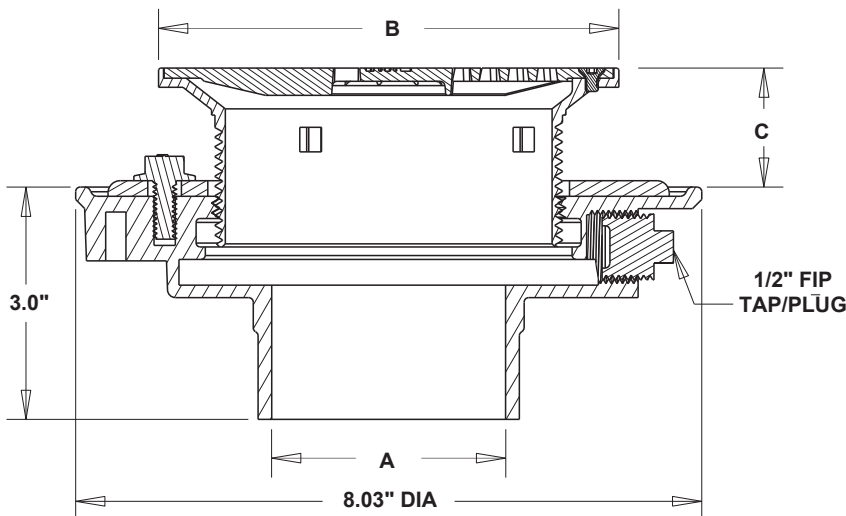

### Create Item Number

### 862-ABCD

e.g. **862-236NQB:** Floor drain - 3" No-Hub connection, 6" square NB head/strainer with debris bucket

#### CONNECTION TYPE **A**

**2** = No-Hub outlet  
**6** = Push-Joint outlet

#### CONNECTION SIZE **B**

**2** = 2"  
**3** = 3"  
**4** = 4"

#### STRAINER DIAMETER **C**

**5NQ** = 5-1/4" square  
**6NQ** = 6" square  
**7NQ** = 7" square  
**8NQ** = 8" square  
**10NQ** = 9-1/2" square

#### OPTIONS **D**

**B** = Debris bucket  
**E** = Drain head extension adapter<sup>1</sup>  
**9** = Side-outlet connection<sup>2</sup>

1: Cast iron - MIP x FIP thread | 2: For 3" and 4" No-Hub connection only