

# TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

## SPECIFICATION

Sioux Chief 865 Series stainless steel slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic, light-duty areas for pedestrian, bicycle and two-wheeled hand cart applications. Grating shall have decorative diagonal pattern and fasten to anchors with screws.

**ADA:** Yes

**Heel-Resistant:** Yes\*

**Load Rating:**

DIN EN 1433: Class A15

ASME A112.6.3: Light Duty

## MATERIALS

**Grate:** 304 Stainless steel - 14 gauge

**Screws:** Nickel-plated brass


## FREE-AREA

33.5 in<sup>2</sup>

## DIMENSIONS

A: Length	36"
B: Width	6"
C: Thickness	0.75"
D: Slot pattern width	4.625"
E: Slot pattern length	5"
F: Slot opening	0.25"

\* Per ASME A112.6.3 requirements

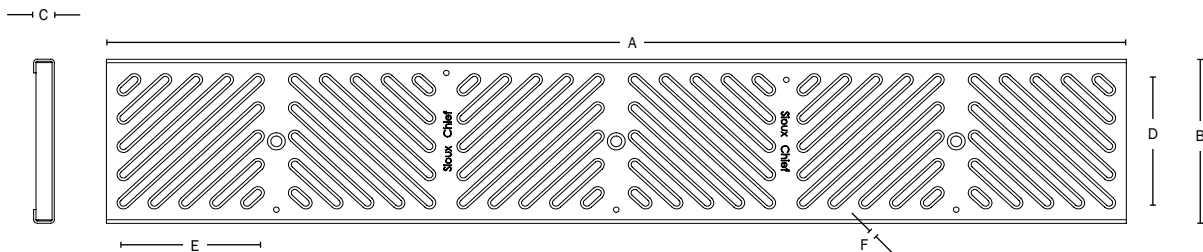

Item Number

**865-GSA**