

# TRENCH DRAIN GRATE FRAME

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____


## SPECIFICATION

Sioux Chief 865 Series ductile iron grate frame shall be used where necessary with FastTrack trench drain channels. Grate frame shall install to the top of the trench drain channel, and provide protection of channel edge from heavy-duty loads, impact, abrasion, and general wear. Grate frame shall work with any FastTrack grate style/material and MUST be used with slotted ductile iron grates for Class D load applications.

## MATERIALS

Ductile Iron

## INSTALLATION




Grate frame must be installed before concrete is poured. Grate frames install over top edge of the channel. Fasten to top of channel with screws. Using grate frames will increase height by 1.0" above channel edge



## DIMENSIONS

A: Length	36"
B: Grate Width	6"
C: Overall Width	12"
D: Height (above channel)	1"
E: Height (inside channel)	¾"

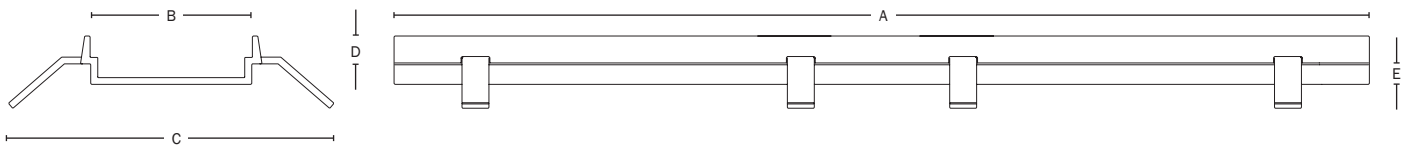

Item Number

**865-F**

One 36" iron grate frame