

# TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

## SPECIFICATION

Sioux Chief 865 Series glass-fiber reinforced polypropylene slotted grating shall be used where necessary with FastTrack trench drain channels. Grating shall be approved for use in applications such as walkways for pedestrian, bicycle, and light cart traffic. Grating shall be lightweight, durable, and U.V./chemical resistant. Grating shall be slip-resistant and fasten to anchors with screws.

**ADA:** Yes

**Heel-Proof:** Yes\*

**Load Rating:**

DIN EN 1433: Class A15

ASME A112.6.3: Medium Duty

## MATERIALS

**Grate:** Glass-fiber reinforced polypropylene

**Screws:** Nickel-plated brass

## FREE-AREA


56.3 in<sup>2</sup>

## DIMENSIONS

<b>A:</b> Length	36"
<b>B:</b> Width	6"
<b>C:</b> Thickness	1.4375"
<b>D:</b> Cross Bar	0.21"
<b>E:</b> Slot opening	0.27"

\* Per ASME A112.6.3 requirements

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

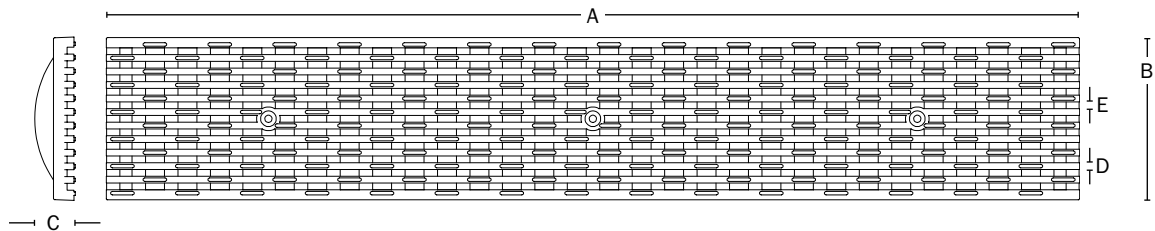

**Item Number**

**865-GHC**