

TRENCH DRAIN GRATE

» 865 SERIES

FastTrack™

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief 865 Series stainless steel brick slot grate shall be used where necessary with FastTrack trench drain channels. Grating shall be corrosion resistant and approved for use in high-traffic areas for pedestrian, bicycle and light vehicle traffic at less than 15 mph. Designed for use with a stone/brick/paver or concrete surface and shall fasten to anchors with screws.

ADA: Yes

Heel-Resistant: No

Load Rating:*

DIN EN 1433: Class C250

ASME A112.6.3: Heavy-Duty

MATERIALS

Grate: 304 Stainless steel - 12 gauge

Screws: Nickel-plated brass


FREE-AREA

15.48 in²

DIMENSIONS

A: Length	36"
B: Width	6"
C: Overall height	3.5"
D: Slot opening	0.4375"
E: Slot OD	0.65"
F: Slot height	2.75"

* Load rating assumes proper concrete encasement of channel and concrete or paver surface with compacted base

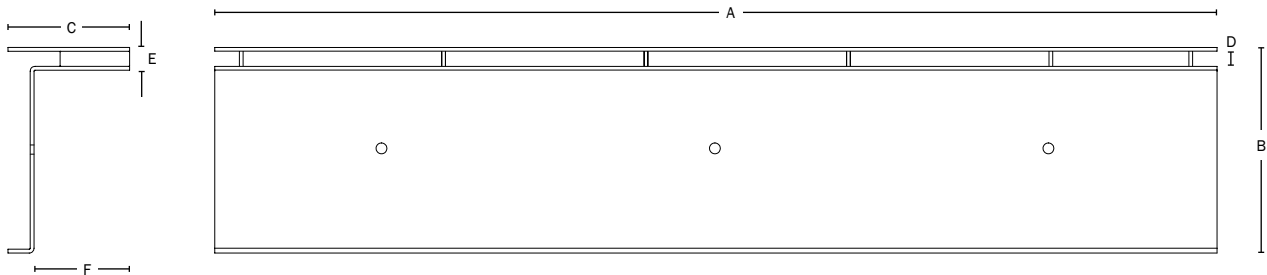

Item Number **865-GSB**