

## Top 150 System Galvanized Steel Grate / C250 / Mesh - ADA

### Product Specifications

#### Part. No.:

**865-T6GSCM (1 m) | 865-T6GS5CM (1/2 m)**

#### Load Class:

C250 (55,100 lbs) according EN 1433

Certified by MPA-HB (independent laboratories)

#### Material:

Galvanized Steel

#### Weight:

15.8 lbs (7.2kg)

#### Surface:

Slot design (0.39" x 1.18")

Slots according ADA Standards

#### Locking:


Patented boltless  
grate locking system

#### Water intake:

209 sq/in (1350cm<sup>2</sup>)

#### Use:


This grate is designed for use with HydroTec  
Top 150 channels made of fiber reinforced  
concrete with a galvanized steel edge protection.

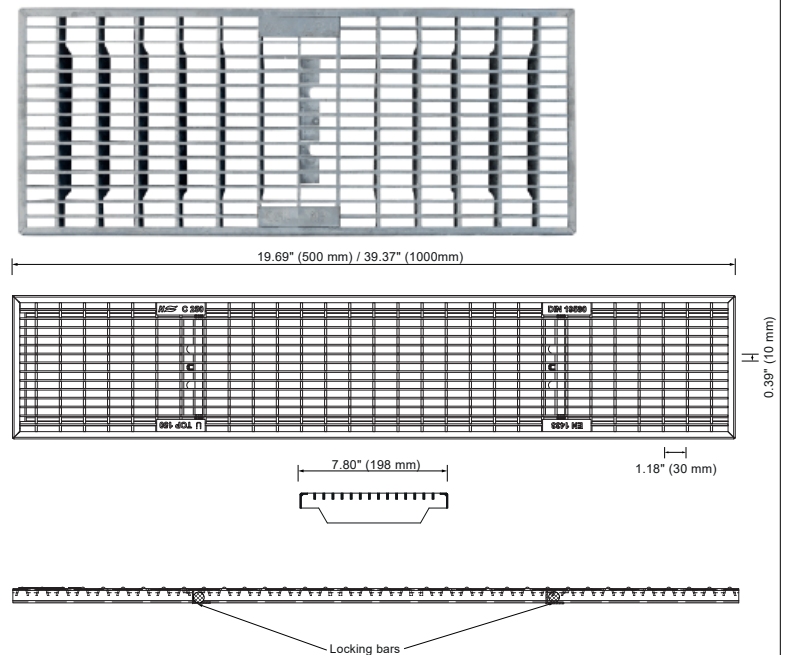

### Fiber Reinforced Concrete Channel

#### Available heights(h):

- 8.27" (210mm)
- 10.24" (260mm)
- 12.20" (310mm)
- sloped (10 sections)



### System Specifications

#### Grate Locking Tool (Part No. 865-TOOL):

The Grate Locking Tool is made of galvanized steel.  
It's used to lock and unlock the grate.

#### Grate:

The grate is made of galvanized steel and certified  
to EN 1433 Load Class C250.

#### Locking Bar (Part No. 865-6LR):

Two locking bars fix the grate to the channel body.  
They're unlocked by the Grate Locking Tool .

#### TOP 150 Channel:

The channel body is made of fiber reinforced  
concrete with a galvanized steel edge protection.  
Connecting profiles at the end of the channel  
guarantee an easy and fast installation.

