

CLEANOUT BUSHING WITH PLUG & COVER

» 875 SERIES

SPECIFICATION

Sioux Chief 875 Series cleanout bushing shall be used where necessary in drainage systems. Cleanout shall include an internally threaded body with sealing plug designed for solvent weld connection inside of 4" Sch. 40 PVC pipe. Nickel-bronze cover and slotted, flush-fit cleanout plug shall be removable and provide access to DWV system for inspection/maintenance.

MATERIALS

Body: PVC

Plug: PVC with brass insert

Screw: Stainless steel

Cover: Nickel-bronze

INSTALLATION


Stub up with 4" Sch. 40 PVC pipe. Finish floor around pipe. Using inside pipe cutter, cut pipe 1/4" to 3/4" below finished floor surface. Prime and solvent weld inside of 4" pipe using appropriate solvent cement, according to manufacturer's instruction. Push into pipe until cover is flush with finish floor. Remove cover and plug. Apply lubricating thread sealant approved for use with plastic to plug threads. Replace plug and tighten into body. Replace cover.

DIMENSIONS

A: Cover diameter	4.5"
B: Plug size	3" Nom. FIP
C: Overall height	2.625"
D: Connection	Inside 4" Sch. 40 PVC*

* The inside diameter of pipe can vary significantly.
Bushings are designed to fit inside most, but may not fit all 4" pipe.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

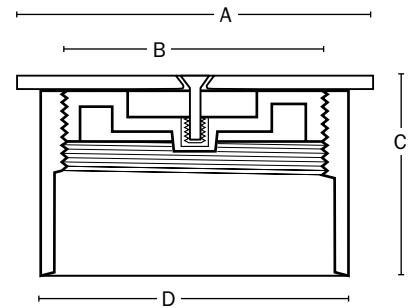

Item Number

875-84PN