

CLEANOUT BUSHING WITH PLUG & COVER

875 SERIES

SPECIFICATION

Sioux Chief 875 Series cleanout bushing shall be used where necessary in drainage systems. Cleanout shall include an internally threaded body with sealing plug designed for solvent weld connection inside of 3" or 4" Sch. 40 PVC or ABS pipe. Nickel-bronze cover and slotted, flush-fit cleanout plug shall be removable and provide access to DWV system for inspection/maintenance.

MATERIALS

Body: PVC, ABS
Plug: PVC, ABS - brass insert
Screw: Stainless steel
Cover: Nickel-bronze

INSTALLATION

Stub up with Sch. 40 PVC pipe. Finish floor around pipe. Using inside pipe cutter, cut pipe below¹ finished floor surface. Prime and solvent weld inside of pipe using appropriate solvent cement, according to manufacturer's instruction. Push into pipe until cover is flush with finish floor. Remove cover and plug. Apply lubricating thread sealant approved for use with plastic to plug threads. Replace plug and tighten into body. Replace cover.

DIMENSIONS


	For 3" Pipe	For 4" Pipe
A: Cover diameter	3.5"	4.5"
B: Plug size	2" Nom. FIP	3" Nom. FIP
C: Overall height	2.0625"	2.625"
D: Connection	Inside 3" Sch. 40 ²	Inside 4" Sch. 40 ²

- For pedestrian traffic, pipe can be cut 3/16" - 3/4" below finish floor surface. For heavier loads, the pipe should be cut such that it supports the outer rim of the nickel-bronze cleanout cover
- The inside diameter of pipe can vary significantly - Bushings are designed to fit inside most, but may not fit all Sch. 40 pipe.

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



875-84PN
(shown)

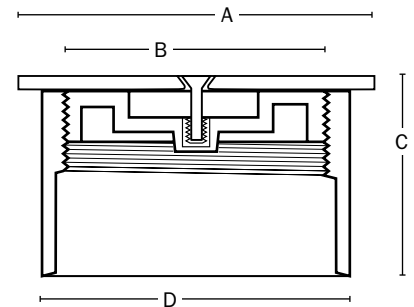

Create Item Number

875-AB

e.g. **875-84PN:** PVC cleanout bushing for 4" pipe with nickel-bronze cover

SIZE A

83 = Inside 3" pipe
84 = Inside 4" pipe

MATERIAL B

AN = ABS
PN = PVC