

# KNOCKOUT CLOSET FLANGE

883/884 SERIES

TKO™

## SPECIFICATION

Sioux Chief 883 or 884 Series TKO closet flanges shall be installed where necessary in drainage systems. Closet flange shall be fastened to floor and provide tabs or slots for fastening closet bolts to flange ring. Flange shall have a 3" Sch. 40 hub connection which conforms to ASTM D2665 (PVC) or D2661 (ABS). Knockout cap must come out in one piece and shall be sized larger than drain opening, to prevent it falling down drain line. Closet flange shall hold a standard head test and be UPC listed.

## MATERIALS

Flange body: PVC, ABS

Flange ring: 430 Stainless steel (884 Series only)

## DIMENSIONS

	883 Series	884 Series
A: Connection	3" Sch. 40 Hub <sup>1</sup>	3" Sch. 40 Hub <sup>1</sup>
B: Overall height	2.46"	2.75"
C: Overall diameter	7.00"	7.00"
D: Screw centers	5.96"	6.09"
E: Flange height	0.42"	0.32"
F: Hub depth	1.50"	1.875"
G: Knockout diameter	3.80"	3.80"

<sup>1</sup> Connection is designed to fit inside most, but may not fit all 4" Sch. 40 PVC/ABS

ITEM # SUBMITTED


JOB NAME

LOCATION

ENGINEER

CONTRACTOR

PO# TAG

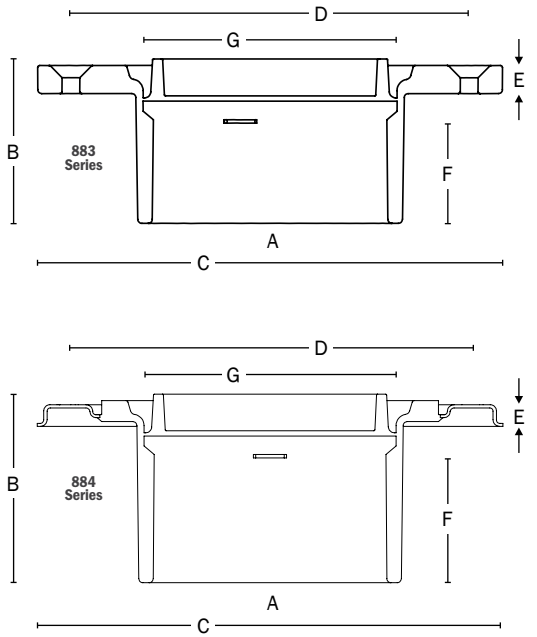

Item Number		
	<b>883 SERIES ONE-PIECE DESIGN</b> <b>883-PT</b> = PVC one-piece knockout closet flange <b>883-AT</b> = ABS one-piece knockout closet flange	<b>884 SERIES SWIVEL RING DESIGN</b> <b>884-PTM</b> = PVC swivel-ring knockout closet flange <b>884-ATM</b> = ABS swivel-ring knockout closet flange