

STUB OUT ELBOW FOR SWEAT

608 SERIES

SPECIFICATION

Sioux Chief 608 Series stub out elbows shall be used where necessary in hot and cold water supply systems. Elbows shall be formed from Type L copper tubing with a spun-closed end and provide full flow to valve or fixture. Tube and elbow inlet/outlet connections shall conform to appropriate standards including ASTM fitting end specifications.

MATERIALS


Type L copper tube

DIMENSIONS

Model:	L246	L248	L2612	L2812
A: Inlet Nom. CTS	1/2" M.SWT	1/2" M.SWT	1/2" M.SWT	1/2" M.SWT
B: Height (Leg)	3-1/2"	3-1/4"	6"	8"
C: Length	6"	8"	12"	12"
D: Tube OD	0.625"	0.625"	0.625"	0.625"
E: Radius	1-1/4"	1-1/4"	1-1/4"	1-1/4"

Model:	L2138	L2187	L348	L4612
A: Inlet Nom. CTS	1/2" M.SWT	1/2" M.SWT	3/4" M.SWT	1" M.SWT
B: Height (Leg)	13"	18"	4"	6"
C: Length	8"	7"	8"	12"
D: Tube OD	0.625"	0.625"	0.875"	1.125"
E: Radius	1-1/4"	1-1/4"	1-3/4"	2"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____

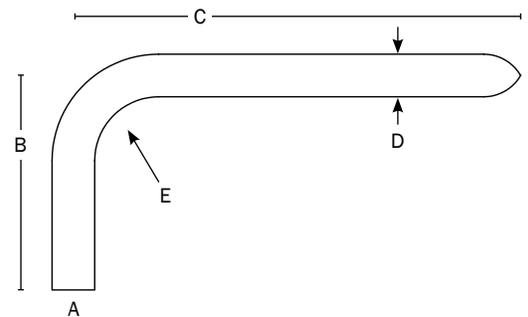

Create Item Number

608-A

e.g. 608-L248: 1/2" Male Sweat, 3-1/4" x 8" stub out elbow

STUB OUT ELBOW A

L246 = 1/2" Male sweat, 3-1/2" x 6" stub out elbow

L248 = 1/2" Male sweat, 3-1/4" x 8" stub out elbow

L2612 = 1/2" Male sweat, 6" x 12" stub out elbow

L2812 = 1/2" Male sweat, 8" x 12" stub out elbow

L2138 = 1/2" Male sweat, 13" x 8" stub out elbow

L2187 = 1/2" Male sweat, 18" x 7" stub out elbow

L348 = 3/4" Male sweat, 4" x 8" stub out elbow

L4612 = 1" Male sweat, 6" x 12" stub out elbow