

# WATER HAMMER ARRESTER

## 660-TS SERIES

MiniRester™

### SPECIFICATION

Sioux Chief 660-TS Series piston-type water hammer arresters shall be installed where required on tub/shower valves. Water hammer arresters shall be specifically sized and have sufficient volume of air to dissipate the calculated kinetic energy generated by closing tub/shower valves in residential or commercial applications. Arresters shall be installed on both hot and cold supply inlets of tub/shower valves. Designed in accordance with ASSE 1010.

### MATERIALS

**Arrester body:** Type L copper tube  
**Connection fitting:** Brass<sup>1</sup>  
**Piston:** Polypropylene with EPDM o-rings

### WORKING LIMITS

**Max working temperature:** 250° F  
**Max working pressure:** 350 PSIG

### INSTALLATION NOTES

Approved for installation with no access panels required.  
 Solder any sweat connections - DO NOT BRAZE.

### CERTIFICATIONS/APPROVALS

Complies with Uniform Plumbing Code (UPC), National Plumbing Code of Canada, International Plumbing Code (IPC). Conforms to ASSE 1010.

### DIMENSIONS


	TS	TSWG	TSX
<b>A:</b> Overall height	8.50"	8.50"	10.0"
<b>B:</b> Top to branch center	7.25"		
<b>C:</b> Center to branch end	1.5625"		
<b>D:</b> Fitting inlet	1/2" FSWT		
<b>E:</b> Fitting outlet	1/2" MSWT		

<sup>1</sup> C69300 dezincification and SCC resistant, and is compliant with NSF-61 Annex G and California No Lead Plumbing Law

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



660-TS

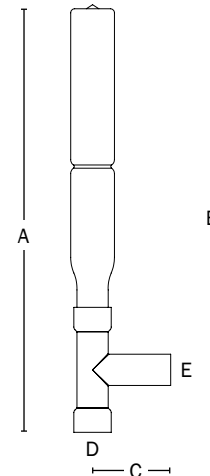

Create Item Number

## 660-A

e.g. **660-TS:** MiniRester™ water hammer arrester for tub/shower connection - 1/2" FSWT x 1/2" MSWT

### CONNECTION TYPE A

**TS** = 1/2" FSWT inlet x 1/2" MSWT outlet  
**TSWG** = 1/2" F1960 PEX inlet x 1/2" MSWT outlet  
**TSX** = 1/2" F1807 PEX inlet x 1/2" MSWT outlet