

# ICE MAKER OUTLET BOX

## 696 SERIES

OxBox™

### SPECIFICATION

Sioux Chief 696 series OxBox™ outlet box shall be used where necessary in plumbing systems. Unit shall allow for mounting with supply lines from top or bottom, on-stud or between-studs. Unit shall include plated, 1/4-turn valve with 1/4" compression outlet. Valve outlets shall be provided with tamper-resistant test caps. Metal support bracket can be installed into tracks of box. Designed in accordance with IAPMO PS 54-2021a.

### MATERIALS

**Valve body:** Forged brass<sup>1</sup>

**Valve shank:** Brass<sup>1</sup> or CPVC with 304SS grip ring, brass nut, silicone seal

**Box/Frame:** ABS

**Arrester body:** 304SS barrel with brass<sup>1</sup> body

**Arrester piston:** Polypropylene with EPDM o-rings

**Bracket:** Galvanized steel

### CERTIFICATIONS/APPROVALS

NSF-372 compliant<sup>1</sup>, IAPMO listed box and valves, Arresters meet ASSE 1010, Valves meet ASME A112.18.1

### VALVE/ARRESTER WORKING LIMITS


**Max Working Temperature:** 200° F

**Max Testing/Working Pressure:** 150 PSIG

### DIMENSIONS

<b>A:</b> Frame width	5-7/8"
<b>B:</b> Frame height	7-1/4"
<b>C:</b> Box width	4"
<b>D:</b> Box height	5-1/2"
<b>E:</b> Box depth	3-1/2"
<b>F:</b> Supply inlet	1/2" Nom.
<b>G:</b> Supply outlet	1/4" Compression
Bracket length	17"

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG

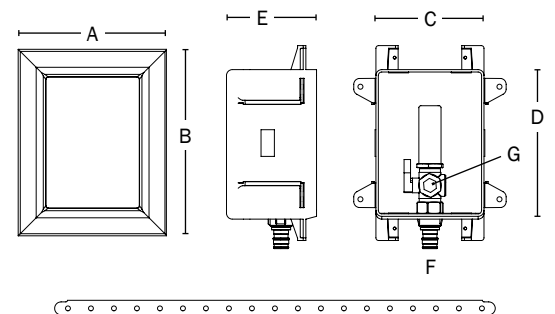

### Create Item Number

## 696-ABC

e.g. **696-G1010XF**: Ice maker outlet box with frame; valve with arrester, F1807 connection

#### ARRESTERS **A**

**G1000** = No arresters

**G1010** = With arresters

#### SUPPLY CONNECTION **B**

**C** = CPVC (male)

**M** = MIP/FSWT

**P** = MSWT/Press/Push

**V** = F3347 PEX

**W** = F1960 PEX

**X** = F1807 PEX

#### FRAME OPTION **C**

**F** = Standard Pack: Outlet box, frame, bracket, and debris cover

**R** = Rough-in Pack: Outlet box, bracket, and debris cover

**FS** = Standard Pack with braided stainless connector<sup>2</sup>

#### Accessories - Available Separately:

696-1F: Single-box frame

696-EX: Frame extension

<sup>1</sup> C69300 material is DZR and SCC resistant, compliant with NSF-61 & 372, and compliant with California No Lead Plumbing Law

<sup>2</sup> Only available for F1807 PEX connection. Braided stainless connector is 1/4" comp. x 1/4" comp. x 72" long