

DWV PIPE HANGER

510 series

Item # Submitted	_____
Job Name	_____
Location	_____
Engineer	_____
Contractor	_____
PO#	_____ TAG _____

SPECIFICATION

Sioux Chief's 510 series DWV Pipe hanger shall be used where necessary to secure Schedule 40 DWV piping according to all national code requirements. Hanger shall be of galvanized steel material, 430 stainless steel or vinyl coated galvanized steel

Hanger shall have a 12" stem length to the top of the pipe loop. Hanger stem shall have alternating mounting hole sizes to accommodate approved mounting hardware.

Locking screw shall be tightened once DWV pipe is installed to secure pipe in place.

MATERIALS

hanger: galvanized steel or 430 stainless steel
screw for gal./vinyl: #12 11 x 1.38 combo self-tapping with bunt point
screw for ss: 18-8 stainless Phillips
vinyl: Plastisol

MAXIMUM RECOMMENDED LOAD

150 lbs.

DIMENSIONS


galvanized	-6PK	-7PK	-8PK	-9PK
A: DWV	1½"	2"	3"	4"
B: Width	¾"	¾"	¾"	¾"
Gauge	18	18	16	16

stainless	-6S	-7S	-8S	-9S
A: DWV	1½"	2"	3"	4"
B: Width	¾"	¾"	¾"	¾"
Gauge	18	18	18	18

vinyl-coated	-6VPK	-7VPK	-8VPK	-9VPK
A: DWV	1½"	2"	3"	4"
B: Width	1"	1"	1"	1"
Gauge	18	18	16	16

applies to all hangers

C: Stem length	12"
D: Small hole	0.188"
E: Large hole	0.275"
F: Distance between	0.86"

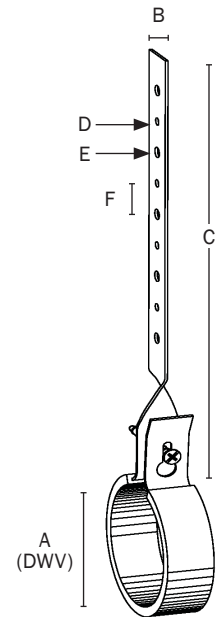

Create Item Number

510-A B

e.g. 510-8VPK = 3" vinyl coated DWV pipe hanger

A	DWV PIPE SIZE	B	MATERIAL/COATING
<input type="checkbox"/> 6	1½"	<input type="checkbox"/> PK	galvanized steel
<input type="checkbox"/> 7	2"	<input type="checkbox"/> S	stainless steel
<input type="checkbox"/> 8	3"	<input type="checkbox"/> VPK	vinyl-coated galvanized
<input type="checkbox"/> 9	4"		