

FLOOR DRAIN

840 SERIES

SPECIFICATION

Sioux Chief 840 series general-purpose floor drain shall be used where necessary in drainage systems. Floor drain shall have an ABS/PVC body with Sch. 40 hub connection in accordance with ASTM D2661/D2665 and connect to pipe via solvent weld joint. Strainer shall be heel-proof, 19-gauge 430 stainless steel and meet applicable load requirements for intended use.

MATERIALS

drain body: ABS or PVC
 strainer: 19-gauge 430 stainless steel

STRAINER LOAD RATING

300 lbs. Light-duty, pedestrian traffic

STRAINER FREE AREA

3.25 in²

DIMENSIONS


A: connection*	2"×3" Sch. 40	3"×4" Sch. 40
B: overall height	1.75"	2.25"
C: top diameter	4.375"	

*connection fits over 2" / inside 3" pipe, or over 3" / inside 4" pipe

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____



840-2P

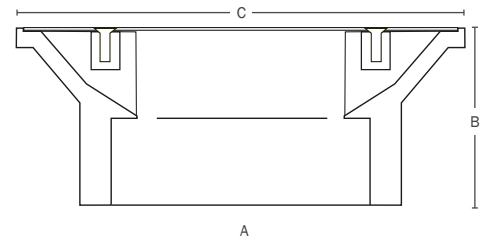

Create Item Number

840-ABCD

e.g. 840-20P: Floor drain with 2" PVC Sch. 40 hub connection, screw-on stainless steel strainer with brass inserts

A CONNECTION

- 2 2" Sch. 40 Hub
- 3 3" Sch. 40 Hub

B STRAINER¹

(skip if using screw-on strainer)

- 7 snap-in strainer

¹ screw-on strainer is standard unless otherwise specified

C SCREW INSERTS²

(skip if using snap-in strainer)

- 0 brass screw inserts

² no screw inserts is standard unless otherwise specified

D DRAIN MATERIAL

- A ABS
- P PVC