

# TRAP PRIMER TAILPIECE

»» 200/213/206 SERIES

TrapEase™

## SPECIFICATION

Sioux Chief 200/213/206 series TrapEase™ trap Primer tailpiece shall be used where necessary to replenish water-filled traps in drainage systems. Trap primer tailpiece shall be a gravity fed device with no mechanical parts and include a 1/2" nominal branch connection. Certified to ASSE 1044 and meets applicable drainage requirements set forth by ASSE 1044.

## INSTALLATION

Installs between lav/sink drain and trap. Replenishes water in floor drain traps to prevent escape of sewer gas. The number of traps serviced by any trap primer is a function of activation frequency and evaporation rate and should be determined by the design engineer and/or the installing contractor.

## MATERIALS<sup>1</sup>

**Body / Nut:** brass

**Arm:** copper

## DIMENSIONS

	200 Series	213 Series	206 Series
<b>A:</b> Inlet	1-1/2" direct connect	1-1/4" fine thread	1-1/2" slip joint
<b>B:</b> Outlet	1-1/2" tubular	1-1/4" tubular	1-1/2" tubular
<b>C:</b> Arm	1/2" nominal	1/2" nominal	1/2" nominal
<b>D:</b> Height	8"	6"	6"
<b>E:</b> Slip socket	n/a	n/a	2-5/8"

<sup>1</sup> Unfinished and chrome-plated options available

ITEM # SUBMITTED	_____
JOB NAME	_____
LOCATION	_____
ENGINEER	_____
CONTRACTOR	_____
PO#	_____ TAG _____




200-090



213-092



206-096

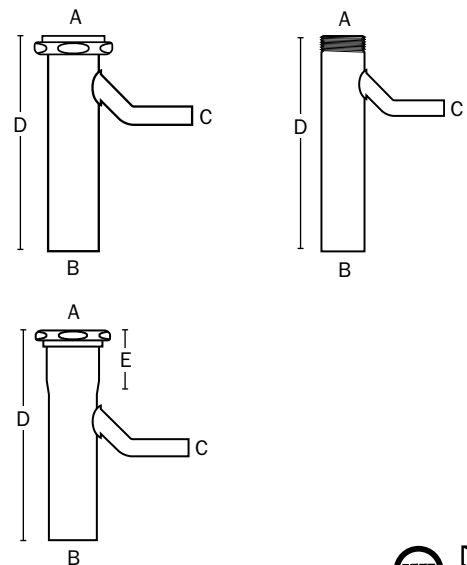

## Select Item Number

**200-090** = Direct connect - Unfinished  
**200-092** = Direct connect - Chrome-plated

**213-090** = Fine thread - Unfinished  
**213-092** = Fine thread - Chrome-plated

**206-096** = Slip Joint - Chrome plated